

**PLANTING PLAN**  
1"=10'

**PLANT LIST - TREES**

SYM	BOTANICAL NAME - COMMON NAME, SIZE
BP	BETULA PAPERIFERA - PAPER BIRCH, 2" CAL
QR	QUERCUS RUBRA - RED OAK, 2" CAL
PM	PSEUDOTSUGA MENZIESII - DOUG FIR, 8-10B&B
PS	PICEA SITCHENSIS - SITKA SPRUCE, 8-10' B&B

**PLANT LIST - SHRUBS**

SYM	BOTANICAL NAME - COMMON NAME, SIZE
AA	AMELANCHIER ALNIFOLIA - SERVICEBERRY, 1 GAL
AC	ACER CIRCINATUM - VINE MAPLE, 1 GAL
CC	CORYLUS CORNUTA - HAZELNUT, 1 GAL
CS	CORNUS STOLINIFERA - REDTIG DOGWOOD, 1 GAL
GS	GAULTHERIA SHALLON - SALAL, 1 GAL
OM	OEMLERIA CERASIFORMIS - INDIAN PLUM, 1 GAL
P	POLYSTICHUM MUNITUM - SWORD FERN, 1 GAL
R	ROSA NUTKANA - NUTKA ROSE, 1 GAL
RS	RUBUS SPECTABILIS - SALMONBERRY, 1 GAL
SD	SPIRAEA DOUGLASII - DOUGLAS SPIRAEA, 1 GAL
SR	SAMBUCUS RACEMOSA - RED ELDERBERRY, 1 GAL
SS	SALIX SCOULERIANS - SCOULER'S WILLOW, 1 GAL

**PLANT LIST - GRASSES & EMERGENTS**

SYM	BOTANICAL NAME - COMMON NAME, SIZE
•	DESCHAMPSIA CESPITOSA - TUFTED HAIRGRASS, 4" POT
•	AGROSTIS SCABRA - 4" POT
*	SCIRPUS MICROCARPUS - SMALL FRUITED BULRUSH, BAREROOT
*	SCIRPUS AMERICANUS - AMERICAN BULRUSH, BAREROOT
*	ELEOCHARIS PALUSTRIS - SPIKE RUSH, BAREROOT
○	CAREX OBNUPTA - SLOUGH SEDGE, BAREROOT
○	CAREX CANESCENS - SEDGE, BAREROOT

**LEGEND**

	HYDROSEED MEADOW GRASS MIX
	HYDROSEED MEADOW GRASS MIX REINFORCED TURF PAVING
	GRAVEL SHORELINE: 6" LIFT OF 1-1/2" GRAVEL 3" LIFT OF 3/8" PEA GRAVEL 3" LIFT OF 4-8 COURSE SAND
	12" DIAMETER COIR LOG

**>>>>CAUTION<<<<**  
**CALL BEFORE YOU DIG!**  
NOT LESS THAN TWO OR MORE THAN TEN BUSINESS DAYS PRIOR TO COMMENCING EXCAVATION OR DEMOLITION, SECURE THE SERVICES OF A COMMERCIAL UNDERGROUND UTILITIES LOCATOR SERVICE TO IDENTIFY BELOW-GROUND IMPROVEMENTS THAT MAY NOT BE INDICATED ON THE DRAWINGS. FOR IRRIGATION SYSTEMS, CALL SEATTLE PARKS PLUMBING SHOP (206 884 7070)  
**>>800 424 5555<<**

- IRRIGATION NOTES:**
1. THE IRRIGATION SYSTEM MUST BE INSTALLED UNDER THE DIRECT SUPERVISION OF A JOURNEY IRRIGATION MECHANIC OR JOURNEY PLUMBER. ALL WORK PERFORMED ON DOMESTIC WATER SYSTEMS MUST BE PERFORMED BY OR UNDER THE DIRECT SUPERVISION OF A LICENSED PLUMBER.
  2. ALL WORK SHALL MEET THE REQUIREMENTS OF APPLICABLE CODES.
  3. NOTIFY ENGINEER OF ANY DISCREPANCIES BETWEEN EXISTING SITE CONDITIONS AND PROPOSED DESIGN PRIOR TO CONSTRUCTION.
  4. NO ROCKS, BOULDERS, DEBRIS, STICKS OR FOREIGN CONSTRUCTION MATERIAL SHALL BE USED IN BACKFILLING OF TRENCHES.
  5. ALL LINES SHALL BE THOROUGHLY FLUSHED OUT PRIOR TO PRESSURE TEST.
  6. USE EXTREME CARE AND HAND DIG TRENCHES WITHIN DRIP LINES OF TREES AND SHRUBS, TUNNELING UNDER LARGE ROOTS WHEN ENCOUNTERED.
- PLANTING NOTES:**
1. LAWN AREAS THAT HAVE BEEN HEAVILY COMPACTED BY EQUIPMENT SHALL BE ROTOTILLED, FINE GRADED, RESEEDED, FERTILIZED, AND ROLLED.
  2. NEW TREES AND PLANTS DELIVERED TO THE SITE SHALL BE STORED IN A SECURE, SHADY AREA FOR INSPECTION. CALL ENGINEER FOR INSPECTION MINIMUM 48 HOURS PRIOR TO PLANTING.
  3. ENGINEER TO FIELD VERIFY ALL PLANTING LAYOUTS.
  4. STAKE TREES FOR ENGINEER'S FIELD APPROVAL.
  5. UNDERGROUND UTILITIES SHALL BE LOCATED PRIOR TO START OF WORK.
  6. CONTRACTOR SHALL PLACE PLANT MATERIALS SO THEY DO NOT INTERFERE WITH IRRIGATION SYSTEM. PLANT LOCATIONS MAY BE ADJUSTED AS LONG AS DESIGN INTENT IS NOT COMPROMISED. IF A CONFLICT OCCURS, CONTRACTOR SHALL NOTIFY ENGINEER FOR APPROVAL OF ANY MAJOR MODIFICATIONS.
  7. CONTRACTOR SHALL GUARANTEE PLANT MATERIAL FOR A PERIOD OF ONE YEAR AFTER THE DATE OF PHYSICAL COMPLETION. CONTRACTOR SHALL REPLACE, AT HIS OWN EXPENSE, ANY PLANTS THAT ARE DEAD OR, AS DETERMINED BY THE ENGINEER, ARE IN AN UNHEALTHY OR UNSIGHTLY CONDITION.

NO.	REVISION - AS BUILT	DATE
3		
2		
1		

**REVIEWED:** PARK ENGINEER \_\_\_\_\_ DATE \_\_\_\_\_  
All work done in accordance with the City of Seattle Standard Plans and Specifications in effect on the date shown above, and supplemented by Special Provisions.




**HALLER LAKE**

**COMMUNITY STREET END**

**PLANTING PLAN & IRRIGATION PLAN**

DESIGNED RR	DATE MAY 2007
DRAWN RR	SHEET 5 of 8
CHECKED JN	
ORDINANCE NO. 121947	<b>Sht. No.</b>
CONTRACT NO. X	
SCALE NOTED	

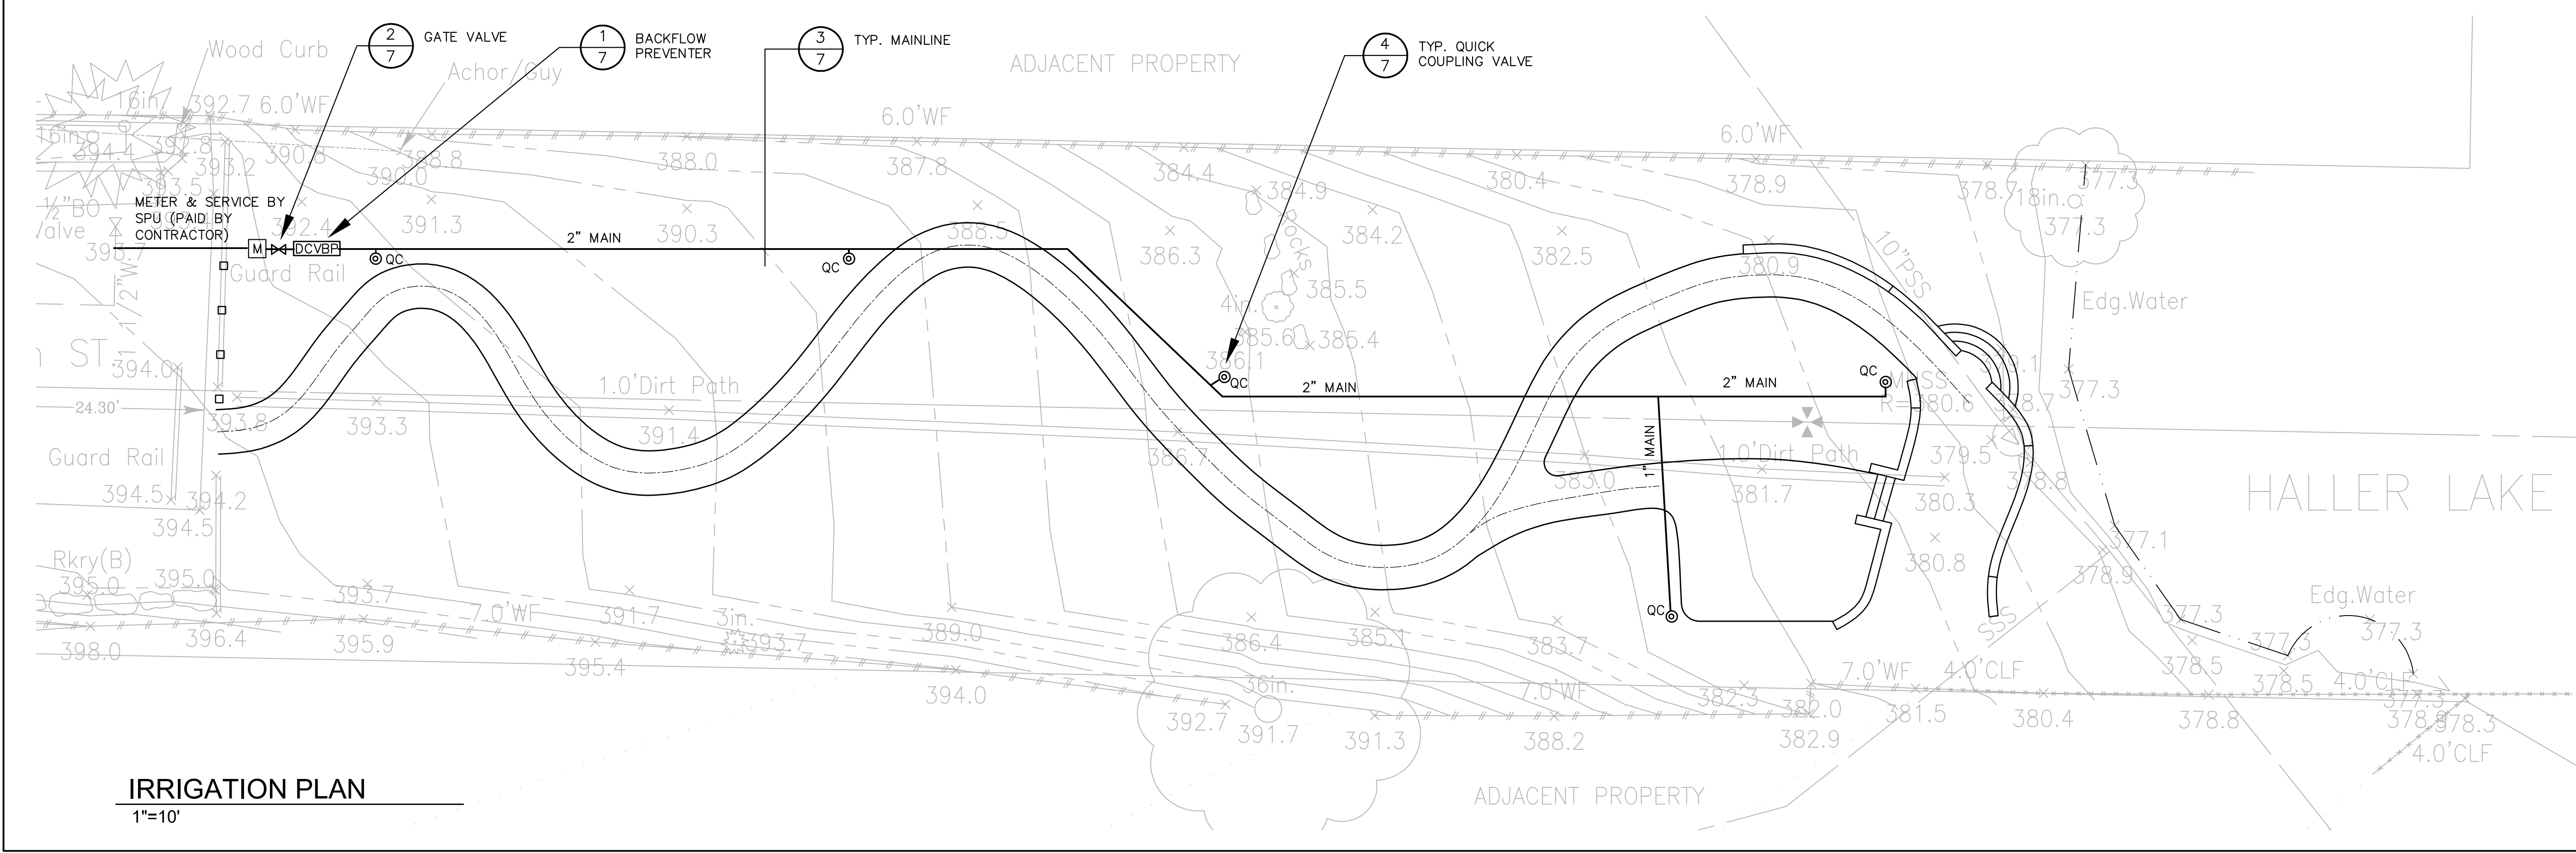

**IRRIGATION PLAN**  
1"=10'